


IS-DG205 Series

5-port Gigabit Unmanaged Layer 2 Industrial Ethernet Switch



The IS-DG205 Series are full Gigabit unmanaged Ethernet Switches that provide easy to access, plug-n-play Gigabit ports for applications; a full Gigabit network provides higher throughput than legacy Fast Ethernet network. The cost effective IS-DG205 Series unmanaged switches can be easily used in factory production line or embedded into machine system. Easy to use, plug&play.

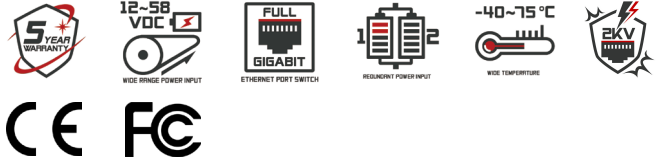

Key features

- ▶ 5 Gigabit Copper ports
- ▶ Support 9K Jumbo frames
- ▶ IEEE 802.3x flow control & back-pressure
- ▶ Layer 2 Line-Speed Switching Fabric, non-blocking
- ▶ Fan-Less design with wide-temperature range (-40~75°C)
- ▶ Redundant power input (12~58 VDC)
- ▶ Reverse power protection
- ▶ Support Din-Rail installation
- ▶ IP 30 Protection
- ▶ Rugged Fan-less Compact size Design
- ▶ 2KV surge immunity on RJ45 Copper ports
- ▶ 1.5KV Hipot

Specification

Ethernet

Operating Mode	Store and Forward, L2 wire-speed/non-blocking switching engine
MAC addresses	4K
Packet Buffer	1.5 Mbits
Jumbo frame	9K
Backplane / Switching Fabric	10 Gbps

RJ45 Copper ports

Speed	10/100/1000 Mbps
MDI/MDIX Auto-crossover	Support straight or cross wired cables
Auto-negotiation/Duplex	10/100/1000 Mbps speed auto-negotiation; Full & Half Duplex

Protocols & Standards

IEEE 802.3, IEEE 802.3u, IEEE 802.3ab, IEEE 802.3az, Flow Control, Back Pressure, ICMP, TCP/UDP

Power

Power Input	Redundant Power Input, DC Input, 4 pin terminal Block
Input Voltage Range	12-58 VDC
Reverse power protection	YES
Power Consumption	IS-DG205, 2.64 Watt

Indicators

Power status indication	Power Input status
Ethernet port indication	Link & speed


Environmental and Compliances

Operating Temperature	-40~75°C (Cold startup at -40°C)
Storage Temperature	-40~85°C
Humidity	5~95% (Non-Condensing)
Vibration, shock, free fall	IEC-60068-2-6, -27, -32
Certification Compliance	CE, FCC
Electrical safety	CE
EMC	FCC Part 15, CISPR 22 (EN55022) Class A IEC-61000-4-2, -3, -4, -5, -6 (Level 3)
RoHS & WEEE	RoHS (Pb free) and WEEE Compliant
MTBF	> 200,000 hrs

Mechanical

Protection	IP30
Dimension	103mm (H) x 32mm (W) x 82mm (D) (without DIN rail clip)
Weight	450 g
Installation	DIN-Rail mounting

Dimension Diagram (mm)

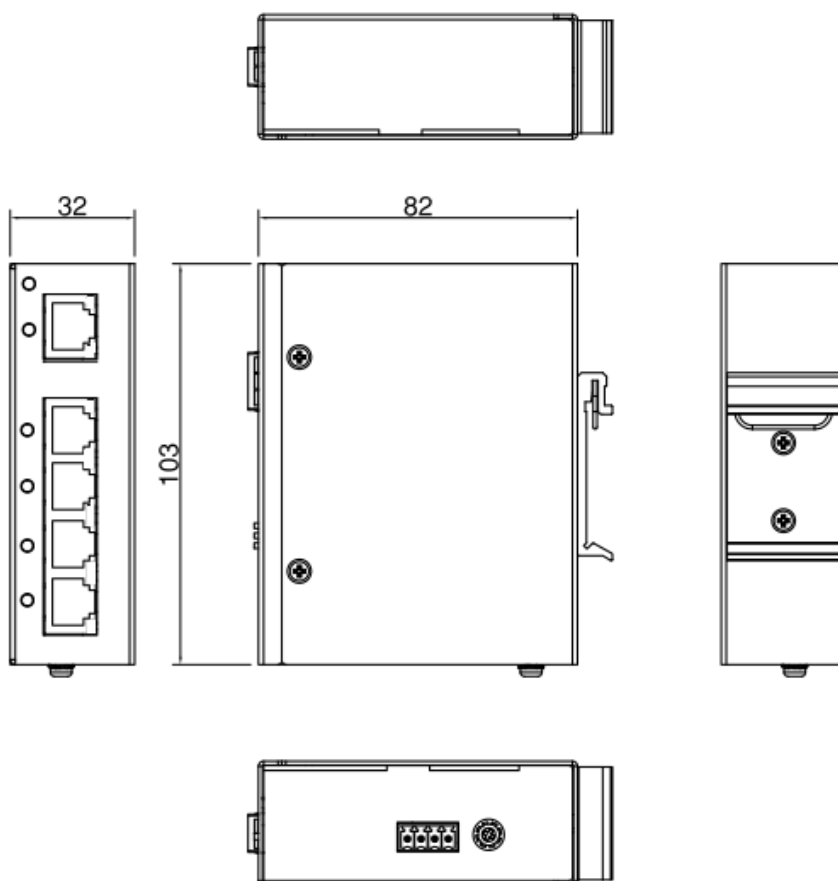

Ordering Information

Available Models	Description	10/100/1000Mb TX	100/1000Mb FX
IS-DG205	Industrial 5 port Gigabit Layer 2 unmanaged Ethernet Switch	5	0

Accessories

1. IS-RK2U 19" rack mount kit
2. IS-RK4U 19" rack mount kit

Package Checklist

- IS-DG205 Switch
- Quick Installation Guide (Printed)
- DIN-Rail kit